

# Phaser™ P370 and P470



Cordless Data Collection

## CORDLESS RF BAR CODE

### Flexibility that Works Inside and Outside the Enterprise

The Phaser P370 and P470 cordless RF bar code scanners from Symbol Technologies are rugged, high-performance wireless devices that enable instant decision-making and seamless communications throughout the enterprise.

Designed with a comfortable forward-scanning pistol grip to minimize fatigue in scan-intensive applications, the P370 and P470 scanners are available in keypad or keyless configurations.

Market	Applications	User
Manufacturing/ Industrial	Loading dock	Shipping and receiving clerks
	Factory floor	Assembly and line personnel
	Warehouse	Forklift operators
Retail	Point-of-sale scanning	Cashiers
	Inventory counts	Clerks
	Price verification	Cashiers

### Easy System Integration and Programmable Architecture

The P370 and P470 offer easy system integration along with a programmable architecture that extends functionality beyond basic bar code scanners. For fast integration, both the P370 and P470 support the 123Scan setup utility software, a convenient Microsoft® Windows®-based program that helps reduce your start-up time and costs for these scanners. This free utility enables you to configure communication settings and enable/disable symbologies. It also assists you in generating advanced data formatting (ADF) rules to allow bar code data to be modified by the scanner before it is sent to the host application. The P370 and P470 scanners can be programmed via PC download or by scanning bar codes generated by the utility.

For added versatility, you can also purchase MCL™-Designer software, a programmable architecture that extends scanner functionality. Even non-programmers can develop custom data management applications to harness the on-board computing power of these scanners. Further, MCL-Link communication software easily connects the P370 and P470 to your host. Capabilities include ODBC database connectivity plus the automation of frequent tasks such as nightly data downloads and look-up file updates.

### Proven Performance and Affordability

With the Phaser P370 and P470 cordless RF bar code scanners, you can choose the device that best meets your application needs in any environment. The P370 is suited for extreme environments, making it ideal for warehouse, yard or loading dock applications. And the P470 delivers the identical data capture functionality



Keyless Version

Features	Benefits
Cordless RF scanning	Enables real-time bar code data collection wherever cables restrict movement or limit access
Keyless and keypad versions	Choose the features most needed
2.4 GHz point-to-point radio frequency technology	Improves accuracy with error-free, reliable data transmission
17-key alphanumeric keypad and 2-line x 20-character display	Allows users to easily view, enter and delete scanned records for maximum productivity
Forward-scanning pistol grip	Reduces user fatigue in scan-intensive environments
Advanced long-range functionality	Enables users to read bar codes from as far as 30 feet (9.1 meters) for maximum productivity
Flash memory	Conduct easy software upgrades in the field
Supports 123Scan utility software and advanced data formatting (ADF)	Delivers seamless integration of scanned data into the existing host application
Sealed to IP54 standards (P370 only)	Suitable for extreme environments
Optional MCL-Designer	Develop custom data management applications
Preloaded inventory application software	Scan and store bar code data, enter quantities, review and delete records

for in-store uses including stockroom tasks and oversized item checkout. Both scanners deliver the proven performance and affordability that customers have grown to expect from Symbol.

For more information, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the web at: [www.symbol.com/phaser](http://www.symbol.com/phaser)

# P370 and P470 Specification Highlights

## Physical Characteristics

Dimensions:	7.0 in. H x 9.2 in. W x 3.5 in. D/17.8 cm H x 23.1 cm W x 9.0 cm D
Weight:	12 oz./336 gm
Color:	P370: Yellow body with dark gray keypad P470: Cash register white body with light gray keypad
Keypad:	17-key keypad; single stroke numeric and shifted alpha; user-programmable function keys
Display:	2-line x 20-character; view long lists/menus using scroll keys with MCL application
Battery:	1100 mAh Lithium-ion battery charged via the cradle
Battery Charge Time:	Fully charged (100%) in approximately 3.5 hours

## Performance Characteristics

Light Source:	650 nm visible laser diode
Scan Rate:	35 ± 5 scans per second (bi-directional)
Nominal Working Distance:	See Decode Zones
Print Contrast Minimum:	P370/470: 20% minimum reflectance P370ALR: 40% absolute dark/light reflectance at 650 nm
Scan Angle:	42° ± 2°
Decode Capability:	UPC/EAN, Bookland EAN, Code 39, Code 39 Full ASCII, Trioptic Code 39, Code 93, Codabar, Interleaved 2 of 5, Code 128, EAN 128, Discrete 2 of 5, MSI Plessey and Coupon Code
Interfaces Supported:	RS-232, MCL-Link Lite or Symbol Synapse cables (Keyboard wedge, USB, OCIA, Dual RS-232, etc.)

## User Environment

Operating Temperature:	P370: -4° to 122° F/-20° to 50° C P470: 32° to 104° F/0° to 40° C
Storage Temperature:	-40° to 158° F/-40° to 70° C
Humidity:	5% to 95% noncondensing
Drop Specifications:	P370: Multiple 6 ft./1.8 m drops to concrete over entire temperature range P470: Multiple 5 ft./1.5 m drops to concrete over entire temperature range
Environmental Sealing:	P370: All components sealed to IP54 against windblown rain and dust
Ambient Light Immunity:	P370/470: Sunlight: 10,000 ft. candles/107,644 LUX Artificial light: 450 ft. candles/4,844 LUX P370ALR: Sunlight: 4,000 ft-candles/ 43,056 LUX Artificial: 450 ft-candles/4,844 LUX

## Applications

Default Application (Preloaded):	Transmit scanned or keyed in alpha-numeric data; key in quantity to eliminate repetitive bar code scanning
MCL-Designer (Optional):	Windows-based application development software for creation of customized P370/P470/P360/P460 scanner applications
MCL-Link (Optional):	Communications software used with MCL-Designer-generated applications enables seamless connection to host application for task automation, ODBC connectivity, real time text messaging, built-in CRC error detection and more

## Radio Specifications

Radio Range:	Up to 100 ft./30 m without a direct line of sight; coexists with Spectrum24 <sup>®</sup> , systems
Frequency:	2.4 GHz point-to-point narrow band, 82 user-selectable channels
Radio Output:	<10 mW

## Base Station

Versions:	PL370 Dark Gray ; PL470 Light Gray
Dimensions:	3.5 in. H x 9.5 in. L x 4 in. W / 8.9 cm H x 24.1 cm L x 10.2 cm W
Power:	Operates from a separate 9V power supply 1.2A
Cables:	RS-232 or Symbol Synapse cables


## Regulatory

Electrical Safety:	Certification to UL1950, CSA C22.2 No. 950, EN60950/IEC950
Laser Safety:	CDRH Class II, IEC Class 2
EMI/RFI:	FCC Part 15 Class B, ICES-003 Class B, European Union EMC Directive, Australian SMA


**EN410 CE**



P370 and P470 Decode Zone

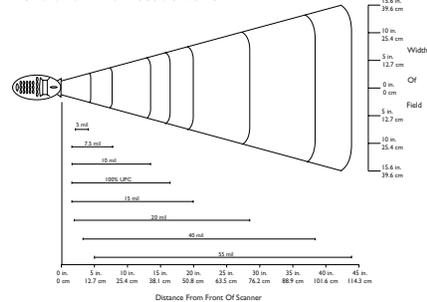

P370ALR Decode Zone

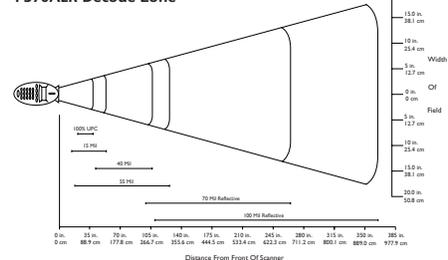

Specifications are subject to change without notice. Symbol® and Phaser™ are registered trademarks of Symbol Technologies, Inc. All other trademarks and service marks are proprietary to their respective owners.



Part No. HQ Printed in USA 05/03 © Copyright 2003 Symbol Technologies, Inc. All rights reserved. Symbol is an ISO 9001 and ISO 9002 UKAS, RVC, and RAB Registered company, as scope definitions apply.

For system, product or services availability and specific information within your country, please contact your local Symbol Technologies office or Business Partner.

**Corporate Headquarters**  
**Symbol Technologies, Inc.**  
 One Symbol Plaza  
 Holtsville, NY 11742-1300  
 TEL: +1.800.722.6234/+1.631.738.2400  
 FAX: +1.631.738.5990

**For Asia Pacific Area**  
**Symbol Technologies Asia, Inc.**  
 (Singapore Branch)  
 Asia Pacific Division  
 230 Victoria Street #05-07/09  
 Bugis Junction Office Tower  
 Singapore 188024  
 TEL: +65.6796.9600  
 FAX: +65.6337.6488

**For Europe, Middle East and Africa**  
**Symbol Technologies**  
 EMEA Division  
 Symbol Place, Winnersh Triangle  
 Berkshire, England RG41 5TP  
 TEL: +44.118.9457000  
 FAX: +44.118.9457000

**For North America, Latin America and Canada**  
**Symbol Technologies**  
 The Americas  
 One Symbol Plaza  
 Holtsville, NY 11742-1300  
 TEL: +1.800.722.6234/+1.631.738.2400  
 FAX: +1.631.738.5990

**Symbol Website**  
 For a complete list of Symbol subsidiaries and business partners worldwide contact us at:  
[www.symbol.com](http://www.symbol.com)

**E-mail**  
[info@symbol.com](mailto:info@symbol.com)

