



IS6520: OEM Scan Engine



MS6520: Presentation Scanner



MS/IS6520 Cubit is a compact, omnidirectional bar code scanner for retail presentation scanning applications, or integrated with Original Equipment Manufacturer (OEM) equipment.

MS/IS6520 Cubit®

Features

Both Models

- **Fully automatic scanning operation**
- **PowerLink User-replaceable cables**
- **Easy programming and configuration**

MS6520 Only

- **Bracket adds vertical tilt capability**
- **Durable housing for added protection**
- **OPOS and JPOS System Compatible**

IS6520 Only

- **Mountable in OEM equipment**

Ideal for price look up, kiosks



Metrologic's Cubit® is a compact, omnidirectional bar code scanner for retail presentation scanning applications, or integrated with Original Equipment Manufacturer (OEM) equipment.

As a retail scanner, the MS6520 Cubit is equipped with a mounting bracket that can be attached securely to a countertop or wall for fixed-mount scanning. The mounting bracket allows for rotation as well, with a locking design that gives Cubit 64° of tilt, making it perfect for installation underneath check writing and credit card stands. Cubit's housing design allows for added protection and durability to withstand the rigors of even the busiest point-of-sale environment.

...presentation scanning and



As an OEM scan engine, the IS6520 Cubit is easy to install using integrated threaded mounting holes, quick-disconnect cables and serial programming. The modular design of the IS6520 is versatile enough for integration into a diversity of applications including kiosks, reverse vending machines, time/attendance machines and price look-up systems.

Projecting a patented omnidirectional scan pattern, Cubit can scan and decode all standard bar codes as they are presented in any orientation.

Cubit looks good, too. Available in three different colors, Cubit blends cosmetically with virtually any existing point-of-sale equipment.

...reverse-vending machines



MS/IS6520 Cubit®

OPERATIONAL

Light Source	Visible Laser Diode 650 nm \pm 10 nm
Laser Power	0.674 mW (peak)
Depth of Scan Field (programmable)	0 mm - 178 mm (0" - 7") for 0.33 mm (13 mil) bar code at default setting
Width of Scan Field	38 mm (1.5") @ face; 102 mm (4") @ 178 mm (7")
Scan Speed	1000 scan lines per second
Scan Pattern	5 fields of 4 parallel lines (omnidirectional)
Number of Scan Lines	20
Minimum Bar Width	0.145 mm (5.7 mil)
Decode Capability	Autodiscriminates all standard bar codes; for other symbologies call Metrologic
System Interfaces	RS232, Light Pen Emulation, Keyboard Wedge, Stand Alone Keyboard, USB
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters
Roll, Pitch, Yaw	360°, 60°, 60°
Beeper Operation	7 tones or no beep
Indicators	Green = laser on, ready to scan Red = good read

MECHANICAL

Length	IS6520:	102 mm (4.0")	MS6520:	133 mm (5.25")
Width		83 mm (3.25")		103 mm (4.06")
Height (front edge)		70 mm (2.75")		88 mm (3.25")
Height (back edge)		55 mm (2.25")		81 mm (3.18")
Weight	IS6520:	298 g (10.5 oz)	MS6520:	460 g (16.2 oz)
Termination	10 position modular RJ45 connector			
Cable	Standard 2.1 m (7') straight; optional 2.7 m (9') coiled for other cables call Metrologic			
Mounting Holes	3 mm threaded; maximum depth of 6 mm (0.24")			


ELECTRICAL

Input Voltage	5 VDC \pm 0.25 V
Power	1.0 W
Operating Current	200 mA typical @ 5 VDC
DC Transformers	Class 2; 5.2 VDC @ 650 mA
Laser Class	CDRH: Class IIa; EN60825-1:1994/A11:1996 Class 1
EMC	FCC, ICES-003 & EN55022 Class A


ENVIRONMENTAL

Operating Temperature	-20°C to 40°C (-4°F to 104°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required


Scan Area

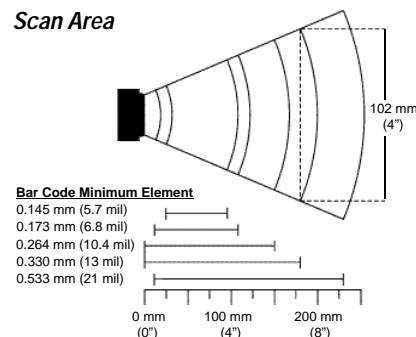


Dimensions (In housing)



Dimensions (without housing)

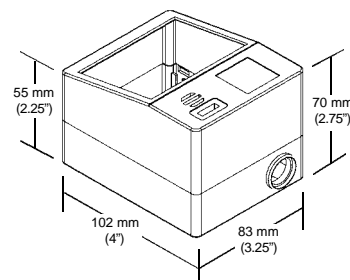

Mounting Holes (rear side of unit)



www.metrologic.com

USA
Tel. 1.800.ID.METRO
info@metrologic.com

Asia
Tel. 65.842.7155
info@sg.metrologic.com

AOA (only)
Tel. 1.617.806.1400
info@aoa.metrologic.com

China (only)
Tel. 86.512.2572511
info@cn.metrologic.com

South America
Tel. 5511.5182.7273
info@sa.metrologic.com

Japan (only)
Tel. 81.03.3839.8511
info@jp.metrologic.com

Brazil (only)
Tel. 5511.5182.8226
info@br.metrologic.com

Europe
Tel. 49.89.89019.0
info@europe.metrologic.com

Specifications subject to change without notice.
Printed U.S.A., Copyright Jaanuary 2002
Metrologic, All rights reserved.



DS6520

Metrologic Instruments, Inc. | 90 Coles Road | Blackwood, NJ 08012-4683
Telephone 856-228-8100 or 1-800-ID-METRO | Fax 856-228-6673