



## Dragon™ reader series

### Industrial Hand-Held Laser Scanners

#### FEATURES

##### Dragon™ Desk:

- 2 meter drop resistance
- 3 optics available
- Man/machine interface: high tone beeper and strong illuminating LEDs

##### Dragon™ Mobile:

- Several models available:
  - With or without display
  - High Performance or Long Range optics system
  - 433MHz or 910MHz radio systems
- Point-to-Point & Multipoint transmission
- 100% compatible with STAR-System™
- 100% compatible with DLL6xxx-R
- Protective case and Desk/Wall holder included

#### APPLICATIONS

- Work-in-progress control
- Warehouse management
- Shipping and receiving control
- Cash & carry retail applications
- Fork lifts
- General use in harsh environments

#### GENERAL DESCRIPTION

Datalogic renews its range of industrial laser scanners introducing the **Dragon™** family: **Dragon™ Desk** and **Dragon™ Mobile**. Based on the same rugged and reliable mechanics of the well-established DLL6000 series, they have been completely renewed inside. Robustness and ergonomics, the main driver of our original project, remain unsurpassed: clearly audible beeper and bright "good read" LEDs for areas where noise levels are normally high; the aim mode, which helps point to the right code, has now been extended to the whole **Dragon™** family. Optical parts are completely suspended on shock absorbers and a careful choice of the body materials, such as the co-moulded rubber, protect the **Dragon™** from damage due to "falls".

New enhanced architecture, based on a M16 high-speed microprocessor, enables exceptional performance for promptness and reading speed of standard codes as well as the ability to read poorly printed and damaged codes. Puzzle Solver Technology™, a patent from Datalogic, adds further strength to the **Dragon™** powerful engine.

In all applications where mobility is a value, the new **Dragon™ M** represents the key to increase productivity and flexibility in the working area. **Dragon™ M** communicates through a low power, licence free radio in the 433 Mhz band (910 Mhz for USA version) and allows bi-directional communication between the base station and the host. **Dragon™ M** also includes a display and a 3 push-button keypad. Thanks to these features, the operator can receive information from the host, actively interact with the central system and visualise the code read. The cordless system offers scalable solutions to solve simple applications and complex projects:

- Point to point: each gun is associated with its own base station;
- Multipoint: many guns (up to 32) transmit data to one base station;
- Network: to cover a wide area, connecting up to 16 bases and 512 guns in automatic roaming simultaneously working.

**Dragon™ M** is 100% compatible with STAR-System™, the new Datalogic RF narrow band solution for mobile applications that provides the widest family of narrow band devices on the market.

# DRAGON™ M, CONFIGURATIONS AND COMMUNICATION

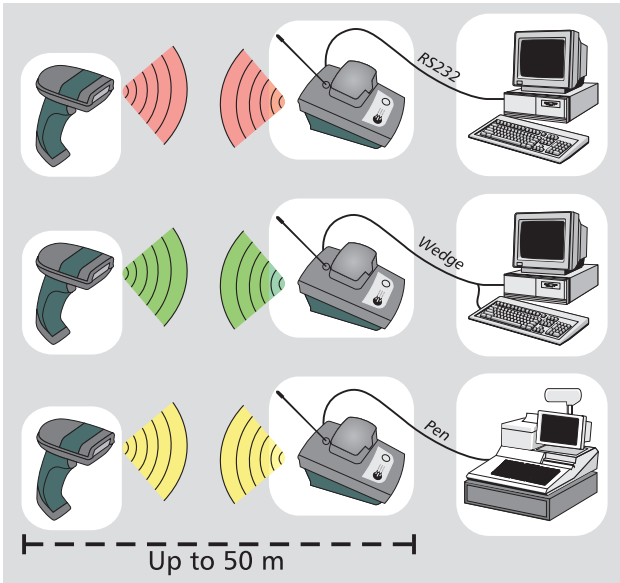


Fig. 1 - Dragon™ M point-to-point connection

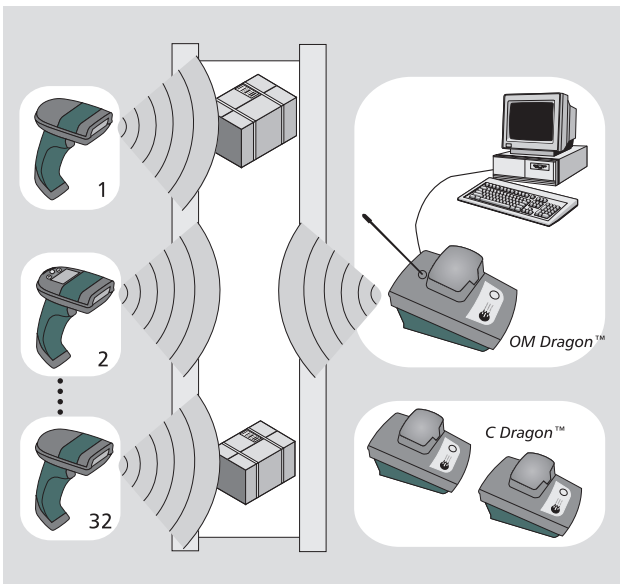


Fig. 2 - Dragon™ M multi-point connection

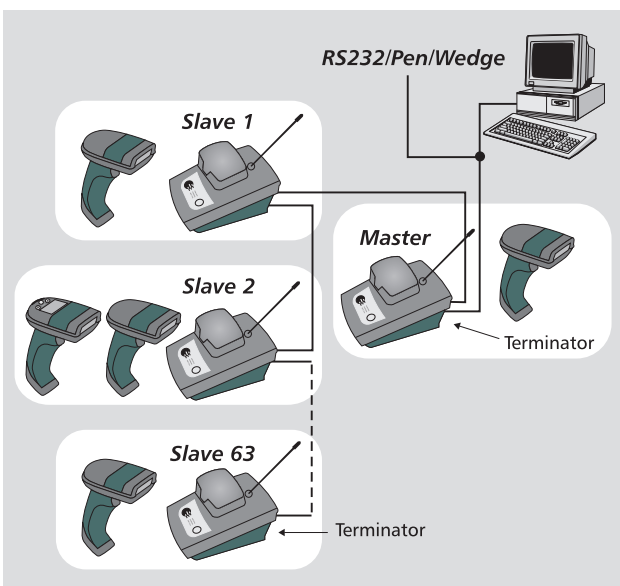


Fig. 3 - Dragon™ M network (Echelon kit required)

The basic configuration of the Dragon™ M system consists of one gun (Dragon™ M) and one cradle (OM-Dragon™). In this case, the configuration is called point-to-point (fig. 1) and in terms of use, has the same functionality of a standard gun without cable constraint.

When more than one gun (up to 32), is connected to a single cradle, a multi-point configuration is created (fig. 2). Multiple user data collection is available in the range of 50 mt with no cabling requirements.

The system can be completed with gun battery chargers, called C Dragon™, to make the whole system less expensive. In addition, different cradles can be connected to each other in a local area network configuration (fig. 3). In this case, the first cradle becomes the master, and can work together with up to 16 cradles, over a maximum length of 1200 meters. This possibility is available both with point-to-point and multipoint configurations.

Regarding communication between a remote gun and a cradle/host, two typical modes can be identified: the first with audible feedback from the cradle the second with visible and audible feedback from the host. The first mode is typical of the gun model without display (connection A - fig. 4). When a code is read the data is sent to the cradle and then to the host. The user hears a beep tone signaling that the code has been read and transmitted. A second short beep confirms that the CRADLE has correctly received the data (acknowledge). The cradle, offered with an integrated multistandard interface, immediately sends the data to the host (connection B) through the selected interface (WEDGE, PEN EMULATION or RS232). The second communication mode is possible when RS232 is selected (connection B). It provides the greatest advantage when used with the DRAGON™ M 101/D (with display). In this case, the system performs a virtual connection C, where the host can talk directly to the gun.

Furthermore, the new Dragon™ M is 100% compatible with the old DLL6xxx-R radio system. Simply by reading the "DLL6xxx-R compatible mode" command the Dragon™ M is made to behave like a DLL6xxx-R, therefore the existing configuration sequence and installation procedure can be applied without changes.


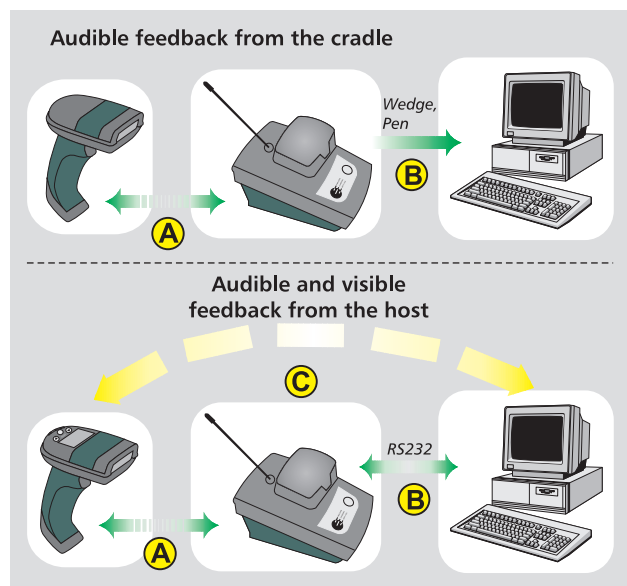


Fig. 4 - Dragon™ communication


## STAR-System™ COMPATIBILITY

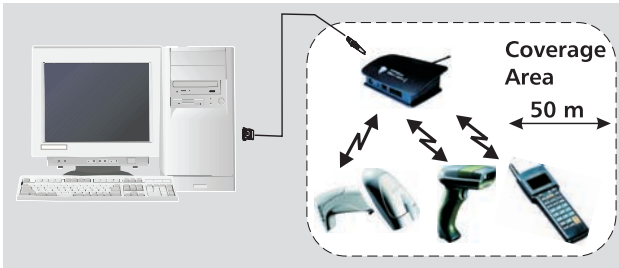

RS232 Stand Alone Configuration

One of the main features of the new Dragon™ M is the compatibility with the STAR-System™, the new Datalogic RF narrow band solution for mobile applications that includes all the RF system components: RF data collection devices, RF base station and software tools. In fact, STAR-System™ provides the widest range of narrow band devices for data collection ever seen on the market. The STAR-System™ is the ideal solution to satisfy and improve the performance of most common data collection applications requiring mobile automatic data capture (e.g. bar code) and real-time feed-back (e.g. price, description, location, etc.) from the ERP/WMS system such as Inventory, Picking, Shipping/Receiving, etc. STAR-System™ provides the most flexible wireless connection between data and business: "RS232 stand-alone" configurations as well as "RS485 network" solutions easily integrate the Datalogic wireless solution with any custom software application running on a standard Windows based PC. STAR-System™ conforms to the European ETSI standard EN300 220-3 and boasts a large number of benefits. It has a wide area coverage, and real-time connection with the user application. Large

ranges of devices are able to solve various applications in different markets. Integration is easy in Windows-based applications, and no operating license is required. Furthermore it is a reliable, fast and cost-effective system with minimal installation costs. To fully support sales offers and complete equipment installations an entire set of professional hardware & software instruments have been developed: with these tools it is very easy to design a successful RF solution as well as to perform a qualified site-survey service. It's clear how the STAR-System™ can improve the throughput of the Dragon™ M, combining the Cordless System opportunities with the Dragon™ M features, it gives you economic and business benefits such as productivity improvement, lower costs and a substantial competitive advantage for the company.

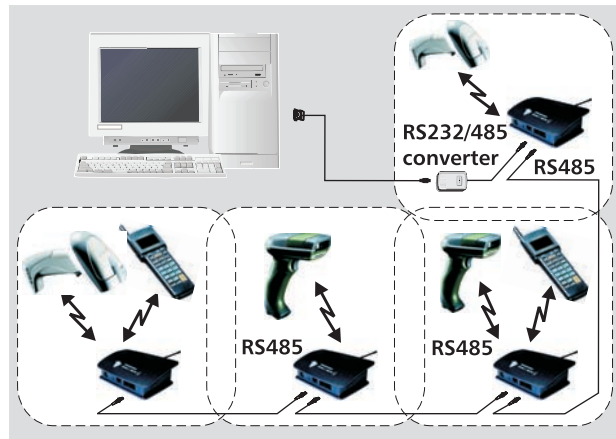

RS485 Network Configuration

## APPLICATIONS AND TARGET MARKETS

### Dragon™ Desk

Manufacturing:

- Shop floor (WIP, Tracking, Quality Control)
- Warehousing

The Dragon™ D is particularly useful in all activities that take place on the shop floor in manufacturing environments; Typically consisting of assembly line material tracking, quality control and work-in-progress. These processes are performed at the highest level of accuracy and speed thanks to the new Dragon™ D reader. Its high mechanical resistance guarantees product duration and investment protection.

### Dragon™ Mobile

Transportation & Logistics: Sorting

Distribution & Retail: Cash & Carry (POS)

Manufacturing: Shop floor (WIP, Tracking); Warehousing (Fork-lift truck, picking and loading, inventory, shipping and receiving, back store)

The Dragon™ M system is designed for tough industrial use: in factory or warehouse applications is a winning card: loading docks, shipping and receiving, inventory control and work in progress are the main activities that gain an incredible advantage with freedom from cable constraint. Forklift truck applications also based on vehicle RF terminals receive advantages in using the Dragon™ M system as a local extension of their data capturing capability.



Cash and Carry



Warehousing



Work-in-progress



Fork-lift truck



# MODELS AND ACCESSORIES

MODEL	DESCRIPTION	ORDER NO.
Dragon D101 HP	High performance laser gun, with multistandard decoder and trigger 4 to 20 Vdc	902151230
Dragon D101 HD	High Density laser gun, with multistandard decoder and trigger 4 to 20 Vdc	902151240
Dragon D101 LR	Long Range laser gun, with multistandard decoder and trigger 4 to 20 Vdc	902151250
Dragon M101, 433Mhz	Cordless laser gun, High Performance scanning engine, no display	902201730
Dragon M101, 910 Mhz	Cordless laser gun, High Performance scanning engine, no display	902201760
Dragon M101/D, 433Mhz	Cordless laser gun, High Performance scanning engine, with display and keypad	902201740
Dragon M101/D, 910 Mhz	Cordless laser gun, High Performance scanning engine, with display and keypad	902201770
Dragon M101/D LR, 433Mhz	Cordless laser gun, Long Range scanning engine, with display and keypad	902201750
Dragon M101/D LR, 910 Mhz	Cordless laser gun, Long Range scanning engine, with display and keypad	902151780
<b>ACCESSORIES</b>		
OM Dragon™ RF (433 MHz)	Base station/charger with multistandard interface	90A301220
OM Dragon™ RF (910 MHz)	Base station/charger with multistandard interface	90A301230
OM Dragon™ RF B /C 433Mhz	Base station/charger with Echelon Network	90A301250
OM Dragon™ RF B /C 910Mhz	Base station/charger with Echelon Network	90A301260
C Dragon™	Smart battery charger	90A301240
B 6010- NM	3480 MWh Ni-Me-Hy battery set	90ACC1530
Cables	See HDD standard cable series	
ADP-102	5P din T-pass adapter	90ACC1030
ADP-103	6P minidin T-pass adapter	90ACC1040
ADP-200	USB adapter	90ACC1610
System Manual	Software manual for Dragon™ series	90ACC1855
SPC-6010	Desk/wall holder	90ACC1470
SPC-Dragon™	Desk/wall holder	90ACC1790
PC Dragon™	Protective case/belt coupler for Dragon™	90ACC1860
PG5 (110 Vac)*	Power supply unit	B9751038
PG5 (220 Vac)*	Power supply unit	B9751037
PG 110	Power supply unit	B9751057
PG 220	Power supply unit	B9751027




\* Only available for Dragon™ D

## SPECIFICATIONS

<b>MODEL</b>	<b>DRAGON™ D</b>	<b>BIT RATE</b>	19,200 baud (European models), 36,800 (USA models)
<b>POWER SUPPLY</b>	4 to 20 Vdc	<b>EFFECTIVE RADIATED POWER</b>	<10 mW (Europe); <1 mW (USA)
<b>CONSUMPTION</b>	250 mA @ 4 V; 170 mA @ 5 V; 40 mA @ 20 V	<b>RADIO RANGE</b>	Up to 50 m (Europe) - Up to 30 m (USA), depending on working area
<b>OPERATING TEMPERATURE</b>	-10 to 50 °C (14 to 122 °F)	<b>MAX NR. COEXISTING SYSTEM</b>	Max 32 devices per radio receiver; max 2000 devices in the same reading area
<b>STORAGE TEMPERATURE</b>	-20 to 60 °C (-4 to 140 °F)	<b>MODELS</b>	<b>DRAGON™ D &amp; DRAGON™ M</b>
<b>DROP RESISTANCE</b>	Withstands repeated drops from 2 m onto a concrete surface	<b>LIGHT SOURCE</b>	VLD 630 - 670 nm (depending on the model)
<b>WEIGHT</b>	Approx. 270 g (9,53 oz)	<b>MAX SCAN RATE</b>	35 +/- 5 scans/sec
<b>MODEL</b>	<b>DRAGON™ M</b>	<b>MAX RESOLUTION</b>	0.08 mm: D101; 0.06 mm: D101; HD; 0.25 mm: D101 LR; 0.12 mm: M 101; 0.25 mm: M101 LR
<b>BATTERY TYPE</b>	NiMh (3480 mWh) (All AA NiCD and Alkaline batteries can also be used)	<b>PRINT CONTRAST RATIO (min)</b>	15% D101, 40% D101 HD, D101 LR 15% M101 40% M101 LR
<b>DISPLAY (M101/D model only)</b>	Graphic with backlight, 32 x 96 dots, and font dimension can be selected by the user (with default selection 4 lines x 16 columns)	<b>READING ANGLE</b>	Skew: +/-60; Pitch: 5 to 55, -5 to -55; Tilt: +/-20
<b>KEYPAD (M101/D model only)</b>	Membrane keypad with 3 keys	<b>READING INDICATORS</b>	Laser ON, Good Read, Beeper, Good transmission (Dragon™ M only)
<b>RECHARGE TIME</b>	2 hours	<b>BAR CODES</b>	2/5 family, Code 39 (plus Code 32, Cip 39), EAN/U.P.C., EAN 128, 128, Code 128, Code 93, CODABAR, TELEPEN, PLESSEY, Code 49, Code MSI, Code Delta IBM, Code 11, CODABLOCK, Code 16K, ISBN/ISSN, ISBT 128
<b>OPERATING AUTONOMY</b>	Over 60,000 with NiMh batteries (Test mode: 100 reads/min)	<b>PROGRAMMING METHOD</b>	Reading special bar codes S/W commands through the serial port Windows configuration program
<b>OPERATING TEMPERATURE</b>	-10 to 40 °C (14 to 122 °F)	<b>Manual</b>	RS 232, Wedge, Pen emulation
<b>STORAGE TEMPERATURE</b>	-20 to 50 °C (-4 to 122 °F)	<b>Automatic (with RS 232)</b>	Puzzle Solver™, data editing and data concatenation
<b>DROP RESISTANCE</b>	Withstands repeated drops from 1,8 m (M101), 1,5 m (M101/D) onto a concrete surface	<b>Sm@rtSet™</b>	ABS and polycarbonate, plus co-moulded rubber
<b>WEIGHT</b>	Approx. 340 g (12 oz)	<b>INTERFACES</b>	Immune to light exposure in offices and facilities, and direct exposure to sunlight
<b>CRADLE</b>	<b>OM DRAGON™</b>	<b>ENHANCED FEATURES</b>	90% non condensing
<b>POWER SUPPLY</b>	10 to 28 Vdc	<b>CASE MATERIAL</b>	Immune to water and dust
<b>POWER CONSUMPTION</b>	max. 8 W	<b>AMBIENT LIGHT CONDITIONS</b>	
<b>READING INDICATORS</b>	Battery charging (red), Charge completed (green) Power/Data (yellow)	<b>HUMIDITY</b>	
<b>DIMENSIONS without antenna</b>	185 X 115 X 104 mm (7.28 X 4.52 X 4.09 in)	<b>ENVIRONMENTAL PROTECTION</b>	
<b>CASE MATERIAL</b>	ABS		
<b>WEIGHT</b>	Approx. 600 g (21,1 oz)		
<b>RADIO SPECIFICATIONS</b>			
<b>RADIO FREQUENCY</b>	433.05- 434.79Mhz (Europe); 909.94- 910.06 Mhz (USA)		



## READING DIAGRAMS

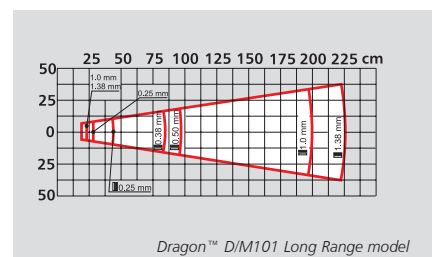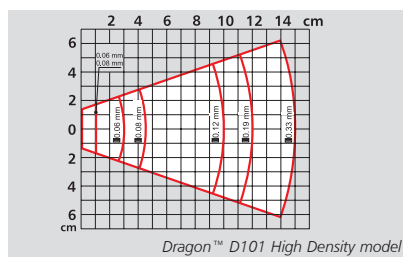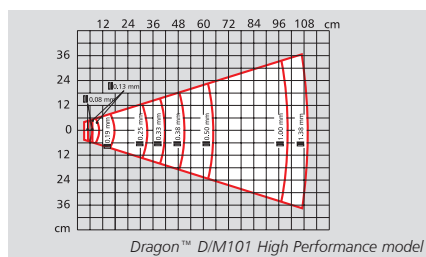

Product and company names and logos referenced may be either trademarks or registered trademarks of their respective companies.

We reserve the right to make modifications and improvements

**Datalogic S.p.A.**  
Italy  
Corporate Headquarters  
Tel. +39 051/3147011  
Fax +39 051/3147170  
info@datalogic.it

**Sales Italy**  
Tel. +39 051/3147011  
Fax +39 051/3147170  
venditeitalia@datalogic.it

**Sales International**  
(Central and South America, Far East, Middle East - Africa)  
Tel. +39 041/5986511  
Fax +39 041/5986550  
sales-intl@datalogic.it

**Australia**  
Datalogic PTY LTD.  
Tel. +61 3/95589299  
Fax +61 3/95589233  
sales@datalogic.com.au

**Germany**  
Datalogic GmbH  
Tel. +49 7026/6080  
Fax +49 7026/5746  
info@datalogic.de

**Sweden**  
Datalogic AB  
Tel. +46 40/385000  
Fax +46 40/385001  
info@datalogic.se

**Austria**  
Datalogic Handelsges. mbH  
Tel. +43 2236/258820  
Fax +43 2236/258825  
office@datalogic.co.at

**Japan**  
Izumi Datalogic Co., Ltd.  
Tel. +81 78/3033400  
Fax +81 78/3033402  
idlmrke@izumi-datalogic.co.jp

**United Kingdom**  
Datalogic UK Ltd.  
Tel. +44 1582/464900  
Fax +44 1582/464999  
enquiries@datalogic.demon.co.uk

**Denmark**  
Datalogic A/S  
Tel. +45 70/239970  
Fax +45 70/239972  
info@datalogic.se

**Netherlands**  
Datalogic Optic Electronics BV  
Tel. +31 346/572888  
Fax +31 346/568736  
info@datalogic.nl

**U.S.A.**  
Datalogic Inc.  
Tel. +1 859/6897000  
Fax +1 859/3344970  
info@datalogic.com

**France**  
Datalogic France S.A.  
Tel. +33 1/60921111  
Fax +33 1/60921340  
info@datalogic.fr

**Spain**  
Datalogic Iberia  
Tel. +34 91/3837755  
Fax +34 91/3837962  
diberia@datalogic.it

**Datalogic Quality Partner**

Datalogic Communication Division  
Printed in Italy July 2002

